

# HOSHIZAKI

## Series


KML450M\_H  
Item # 13069 5/03

**KML-450M\_H SERIES**




**KML-450MAH**  
Air-Cooled  
**KML-450MWH**  
Water-Cooled

**KML-450MAH Cuber  
Shown on Optional  
B-500 Bin**



**B-250**





**B-500**



**DB-200**

<b>ICEMAKER DIMENSION</b>	
Width x Depth x Height	
<b>KML-450M_H</b>	
30 x 27 <sup>3</sup> / <sub>8</sub> x 22	
<b>DIMENSION BY BIN SIZE</b>	
Width x Depth x Height	
<b>B-250</b>	30 x 32 <sup>1</sup> / <sub>2</sub> x 55 <sup>3</sup> / <sub>8</sub>
<b>B-500</b>	30 x 32 <sup>1</sup> / <sub>2</sub> x 68
<b>DB-200</b>	30 x 30 x 75

- Durable stainless steel exterior
- CycleSaver™ design 
- EverCheck™ alert system 
- Up to 433 lbs. of ice production per 24 hours
- Individual crescent cube
- Stainless steel evaporator
- Removable air filters



Reliability is a beautiful thing®

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com


**LOW-PROFILE MODULAR CRESCENT CUBER**

# KML450M\_H SERIES

# DIMENSIONS (Inches) - CONNECTIONS

LOW-PROFILE MODULAR CRESCENT CUBER

KML-450MAH (AIR-COOLED)  
KML-450MWH (WATER-COOLED)



■ Up to 433 lbs. of ice production per 24 hours



<b>WARRANTY</b> THREEYEAR - Parts & Labor on entire machine. FIVEYEAR - Parts & Labor on : Evaporator FIVEYEAR - Parts on: Compressor, Air-Cooled Condenser.	<b>STAINLESS STEEL</b> <b>INTERNAL EVAPORATOR</b>	<b>SERVICE</b> Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	<b>R-404 REFRIGERANT</b>	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

**STORAGE BINS**

B-250 - 250 lb. Application Capacity (230 lb. ARI-Rated Capacity Bin)  
 B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin)  
 B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin)  
 B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin)  
 B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin)  
 B-1200 - 1200 lb. Application Capacity  
 B-1500 - 1500 lb. Application Capacity

OPERATING LIMITS		ELECTRICAL & PLUMBING	
Ambient Temp Range	45 - 100°F	115/60/1	
Water Temp Range	45 - 90°F	20 amp Max Fuse/HACR Breaker Size	
Voltage Range	104-127V	1/2" OD copper or equivalent independent potable water supply	
Water Pressure	10 - 113 psig	3/4" independent drain connection	

**AIR - COOLED**

Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	432	400	381
	80°	408	359	353
	90°	400	<b>324</b>	313

**WATER - COOLED**




Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	433	426	402
	80°	428	417	385
	90°	426	<b>409</b>	380

**UTILITY CONSUMPTION**

Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal per 100 lbs.
	Lbs.	Cubes			
KML-450MAH	6.6	360	8.7	28.3	NA
KML-450MWH	6.6	360	6.2	27.8	150

**SPECIFICATIONS**

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KML-450MAH	Air-Cooled	13.3	20	185 lbs.
KML-450MWH	Water-Cooled	10.0	15	185 lbs.

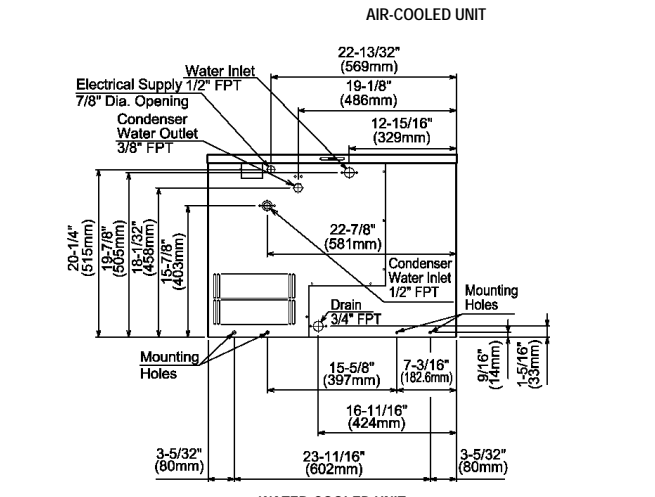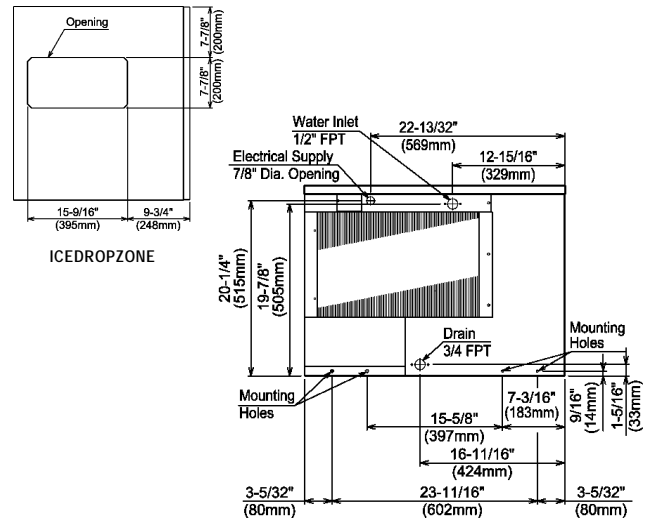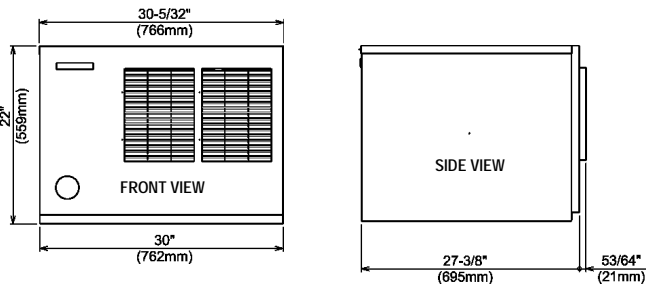

We reserve the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269 1-800-438-6087 FAX 1-800-345-1325 TEL 770-487-2331 www.hoshizaki.com

Printed in U.S.A.