

HOSHIZAKI


KM-250B_F
Item # 13031 9/03

KM-250B_F SERIES



KM-250BAF Cuber



KM-250BAF
Air-Cooled
KM-250BWF
Water-Cooled



KM-250

**ICEMAKER
DIMENSION**

Width x Depth x Height
KM-250B_F
25 x 28 x 39

- CycleSaver® design 
- EverCheck® alert system 
- Up to 236 lbs. of ice production per 24 hours
- Built in 100 lbs. ice storage
- Individual crescent cube
- Corrosion-resistant stainless and PVC exterior surfaces provide longer life
- Stainless steel evaporator
- Removable air filter



Reliability is a beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

TEL770-487-2331

1-800-438-6087

FAX 1-800-345-1325


www.hoshizaki.com



CRESCENT CUBER WITH BUILT-IN STORAGE BIN

CRESCENT CUBER WITH BUILT-IN STORAGE BIN

KM-250BAF (AIR-COOLED)
KM-250BWF (WATER-COOLED)





- Up to 236 lbs. of ice production per 24 hours
- Built in 100 lbs. of ice storage



WARRANTY THREEYEAR - Parts & Labor on entire machine. FIVEYEAR - Parts & Labor on: Evaporator FIVEYEAR - Parts on: Compressor; Air-Cooled Condenser Coil.	STAINLESS STEEL INTERNAL EVAPORATOR	SERVICE Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	R-404 REFRIGERANT	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

STORAGE BINS Built-in 100 lbs. Storage Capacity					
OPERATING LIMITS Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 104 - 127V Water Pressure 10 - 113 psig		ELECTRICAL & PLUMBING AC Supply Voltage 115V/60/1 1/2" OD copper or equivalent independent potable water supply 3/4" independent drain connection 1/2" FPT Water Inlet			
AIR - COOLED					
Water Temp ° F.		50°	70°	90°	
Air Temp ° F.	70°	236	222	197	
	80°	226	204	176	
	90°	222	189	161	
WATER - COOLED					
Water Temp ° F.		50°	70°	90°	
Air Temp ° F.	70°	233	224	212	
	80°	226	211	200	
	90°	224	201	190	
UTILITY CONSUMPTION					
Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gallons per 100 lbs.	Condenser Water Gallons per 100 lbs.
	Lbs.	Cubes			
KM-250BAF	3.7	200	12.5	30.3	NA
KM-250BWF	3.9	200	10.2	42.2	150
SPECIFICATIONS					
Model Number	Condenser	Amperage	Shipping Weight		
KM-250BAF	Air-Cooled	10.5	200 lbs.		
KM-250BWF	Water-Cooled	9	200 lbs.		

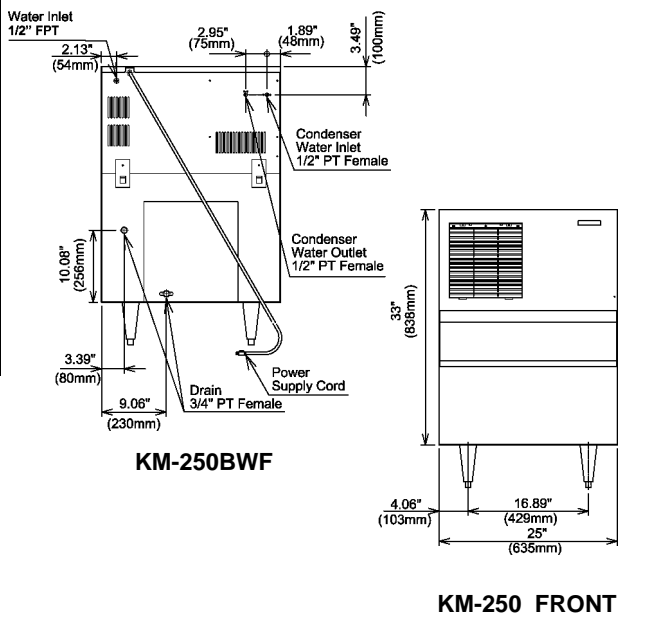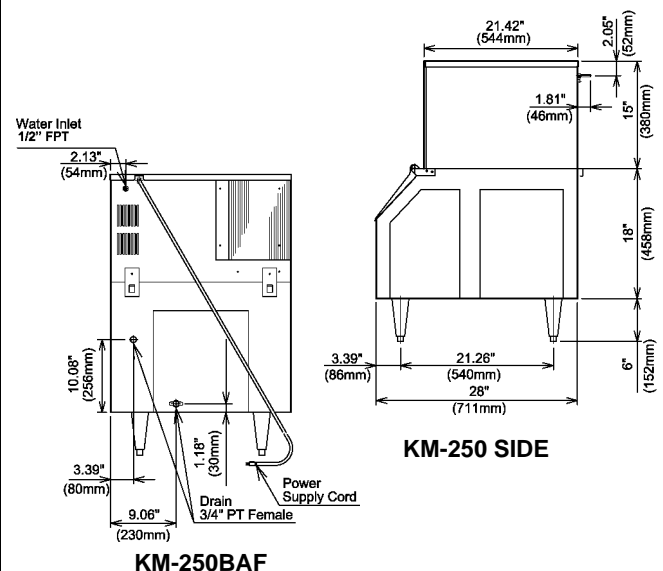

We reserve the right to change specifications without notice.

© **HOSHIZAKI AMERICA, INC.**

618 Hwy. 74 S., Peachtree City, GA30269 TEL770-487-2331 1-800-438-6087 FAX 1-800-345-1325 www.hoshizaki.com

Printed in U.S.A.