

HOSHIZAKI

DCM-500B_F/SD-450 9/03
Item # 13143


DCM-500B_F/SD-450 SERIES

SANITARY CUBELET ICEMAKER/DISPENSER




DCM-500BAF
Air-Cooled
DCM-500BWF
Water-Cooled
SD-450
For DCM-500

DCM-500BAF
on an
optional SD-450




DCM-500BAF
Countertop



DCM-500BAF
Countertop with
optional 6" legs



DCM-500BAF
Floor Model with
optional stand



SD-450
stand

ICEMAKER DIMENSION

Width x Depth x Height

DCM-500BAF

26 x 22 1/2 x 40

DCM-500 w/ legs*

26 x 22 1/2 x 46

DIMENSION BYBIN SIZE

Width x Depth x Height

DCM-500 w/ stand*

26 x 22 1/2 x 72 1/2

SD-450 Stand

26 1/4 x 22 x 32 1/2

* Optional Items

DCM-500B_F

● **CleanCycle 12®**



- Every 12 hours unit performs a 15-minute purge to rid itself of impurities
- Up to 567 lbs. of ice production per 24 hours, with 40 lbs. built-in storage
- Dispenses ice and water
- Self contained design reducing opportunities for cross contamination
- Easy to chew, cubelet ice
- Removable air filters

SD-450 Stand

- Heavy duty stand for floor model icemaker/dispenser
- Corrosion resistant stainless steel exterior
- Easy cleaning with attractive appearance



Reliability is a
beautiful thing™



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com

SANITARY CUBELET ICEMAKER/DISPENSER

DCM-500BAF (AIR-COOLED)**DCM-500BWF** (WATER-COOLED)**SD-450** (FOR DCM-500)

- Up to 567 lbs. of ice production per 24 hours, with 40 lbs. of built-in ice storage
- Dispenses ice and water

**WARRANTY**

TWO YEAR - Parts & labor on entire machine.

FIVEYEAR - Parts on: Compressor, Air-Cooled Condenser.

**STAINLESS STEEL
INTERNAL AUGER****R-404 REFRIGERANT****SERVICE**

Panels easily removed and all components accessible for service.

Removable/cleanable air filters.

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

OPERATING LIMITS

Ambient Temp Range 45 - 100°F
 Water Temp Range 45 - 90°F
 Voltage Range 104 - 127V
 Water Pressure 10 - 113 psig

ELECTRICAL

115/60/1
 20 amp Max Fuse Size

STORAGE BIN

Built-in 40 lb. capacity

MACHINE STAND

Optional SD-450

THERMAL RELAY protects gear motor from overload

GEAR MOTOR runs two minutes after termination of icemaking to clear all ice from evaporator

Clean Cycle 12: 15 minute purge every 12 hours**AIR - COOLED**

Water Temp° F.	50°	70°	90°
Air Temp° F.			
70°	525	510	485
80°	461	438	416
90°	396	385	358

WATER - COOLED

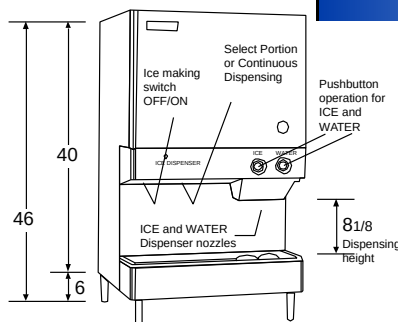




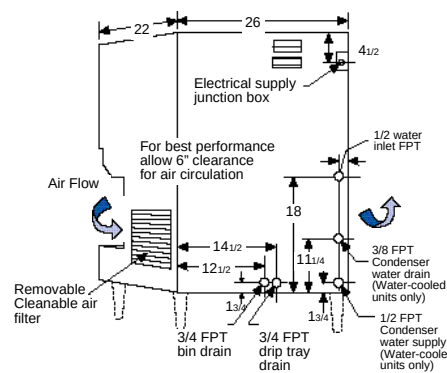




Water Temp° F.	50°	70°	90°
Air Temp° F.			
70°	567	549	539
80°	529	519	509
90°	500	495	481

UTILITY CONSUMPTION

Model Number	Approximate Electrical		KWH per 100 lbs.	
	90/70	70/50	90/70	70/50
DCM-500BAF	1055W	985W	6.6	4.4
DCM-500BWF	967W	991W	4.7	4.1

SPECIFICATIONS

Model Number	Condenser	Amperage	Min Circuit Ampacity	Shipping Weight
DCM-500BAF	Air-Cooled	12	20	276 lbs.
DCM-500BWF	Water-Cooled	11.5	20	269 lbs.
SD-450	N/A	N/A	N/A	109 lbs.

**40 lb. Capacity Built-in Bin****Counter Top****Counter Top****Floor Model with Optional Stand****Optional Stand**

We reserve the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com

Printed in U.S.A.