

Project Name:	
Location:	
Item #:	Qty:
Model:	

# SELF-CONTAINED INDOOR ICE MACHINES

**MODEL:** 

MIM50

MIM50V





MIM50V

## **ELECTRIC** -

115V / 60Hz / 1Ph (230V / 50-60Hz / 1Ph is available as an option) 6' (2m) NEMA 5-15P cord set inculded



NEMA 5-15P

# **3RD PARTY APPROVALS -**











Certified to ANSLIII 563

DOE 2018 Compliant

Meets Energy Star Guidelines Zero Ozone Depletion Potential

## MAXX ICE WARRANTY (USA / CANADA) -

Contact Maxx Ice for warranty statement at TechnicalServices@TheLegacyCompanies.com or 877.368.2797 The Maxx Ice MIM50 series of indoor ice machines produce up to 65 pounds of ice per day (under ideal conditions). These stylish, durable and easy to install models are perfect for any freestanding or built-in application.

#### FEATURES AND CONSTRUCTION -

- Stainless steel / black painted steel (MIM50) or black painted steel (MIM50V) exterior
- Air-cooled compressor
- Solid state controls
- Built-in self cleaning mode
- Automatic overflow prevention
- 25 lb storage bin
- Field reversible door
- Adjustable durable feet
- Includes ice scoop and tubing for supply and drain lines

## **DAILY ICE PRODUCTION -**

Air Temp 70°F (21°C) / Water Temp 50°F (10°C) 

Air Temp 90°F (32°C) / Water Temp 70°F (21°C) MIM50...... 51 lbs (23 kg) MIM50V...... 51 lbs (23 kg)

## ICE BIN STORAGE CAPACITY ——

MIM50	25	lbs	(11	kg)
MIM50V	25	lbs	(11	kg)


## OPERATING REQUIREMENTS —

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C) Water Temperature Range ............... 41° to 90°F (5° to 32°C) Water Usage per 100 lbs of ice...... 13.8 Gallons (52.2L) Water Supply Line Connection ....... 1/4" O.D. Compression Water Pressure Range:

Min PSI...... 15 Max PSI ......75\* Min Bar ..... 1.0 Max Bar.....5.5

\*Above 75 PSI requires a regulator Energy Consumption per 100 lbs of ice:

> MIM50...... 10.1 kWh/100 lbs

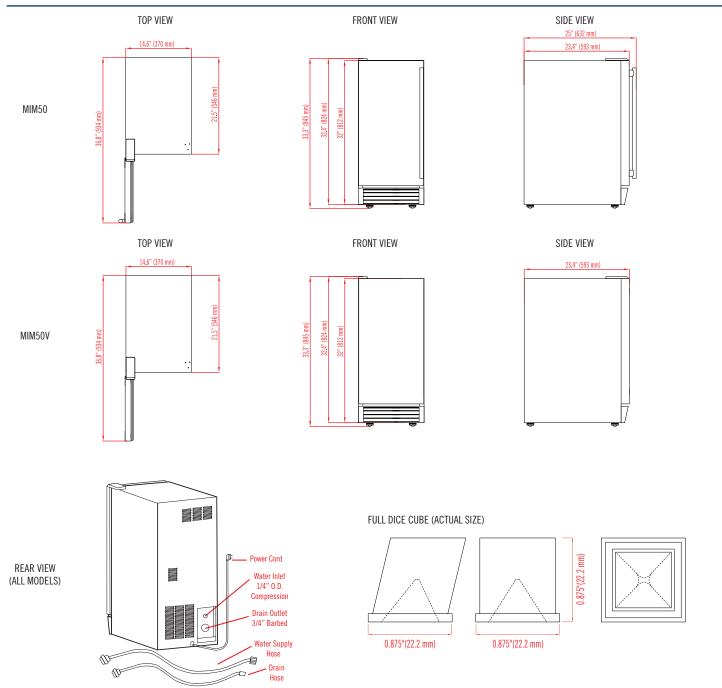

MODEL	EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE Capacity	NET WEIGHT / Shipping Weight	AMP DRAW (Making / Harvesting)	REFRIGERANT And Charge Size	ELECTRICAL
MIM50	14.6" x 25" x 33.3" (370 x 632 x 845 mm)	65 lbs (29.5 kg)	25 lbs (11 kg)	84 lbs (38 kg) 93 lbs (42 kg)	3A / 3.6A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph
MIM50V	14.6" x 23.4" x 33.3" (370 x 593 x 845 mm)	65 lbs (29.5 kg)	25 lbs (11 kg)	84 lbs (38 kg) 93 lbs (42 kg)	3A / 4A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph

# **INSTALLATION** -

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended