

# KM-151B\_H

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-151B\_H

6/11

Item # 13236

### CUBER DIMENSIONS W x D x H

**KM-151B\_H**  
23<sup>3/4</sup> x 28 x 39\*  
\* with 6" legs





### KM-151BAH

Air-Cooled  
Shown

### KM-151BWH

Water-Cooled

- Up to 146 lbs. of ice production per 24 hours
- Up to 78 lbs. of built-in storage capacity
- Individual crescent cube
- Durable stainless steel exterior
- CycleSaver® Design 
- EverCheck® alert system 
- Front in, front out airflow (Air-cooled model only)
- Stainless steel evaporator
- Slide in door
- Removable air filter (Air-cooled model only)
- Power switch accessible without panel removal
- Built-in installation possible
- R-134a Refrigerant
- \* The KM-151BAH is ENERGY STAR qualified.

### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



# SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

## DIMENSIONS

W x D x H

**KM-151B\_H**  
23<sup>3/4</sup> x 28 x 39\*  
\*with 6" legs

- Air-cooled
- Water-cooled

### AIR-COOLED

| Water Temp° F.   | 50° | 70°        | 90° |
|------------------|-----|------------|-----|
| Air Temp° F. 70° | 146 | 139        | 129 |
| Air Temp° F. 80° | 140 | 129        | 119 |
| Air Temp° F. 90° | 139 | <b>121</b> | 111 |

### WATER-COOLED

| Water Temp° F.   | 50° | 70°        | 90° |
|------------------|-----|------------|-----|
| Air Temp° F. 70° | 146 | 141        | 136 |
| Air Temp° F. 80° | 142 | 135        | 131 |
| Air Temp° F. 90° | 141 | <b>130</b> | 125 |



### UTILITY CONSUMPTION

| Model Number | Ice Production Per Cycle |       | KWH per 100 LBS. | Potable Water Gal. per 100 lbs. | Condenser Water Gal. per 100 lbs. |
|--------------|--------------------------|-------|------------------|---------------------------------|-----------------------------------|
|              | Lbs.                     | Cubes |                  |                                 |                                   |
| KM-151BAH    | 2.75                     | 130   | 8.4              | 17.8                            | N/A                               |
| KM-151BWH    | 2.75                     | 130   | 7.3              | 25.0                            | 140                               |


### SPECIFICATIONS

| Model Number | Condenser  | Amperage | Min. Circuit Ampacity | Shipping Weight |
|--------------|------------|----------|-----------------------|-----------------|
| KM-151BAH    | Air-Cooled | 7.0      | 15A                   | 150 lbs.        |
| KM-151BWH    | Air-Cooled | 6.8      | 15A                   | 154 lbs.        |


### KM CUBE DIMENSIONS

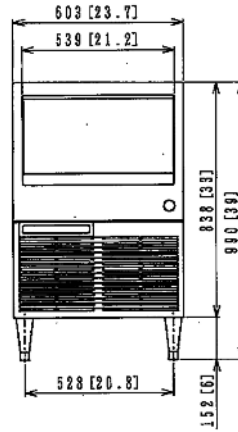


FRONT DIMENSIONS

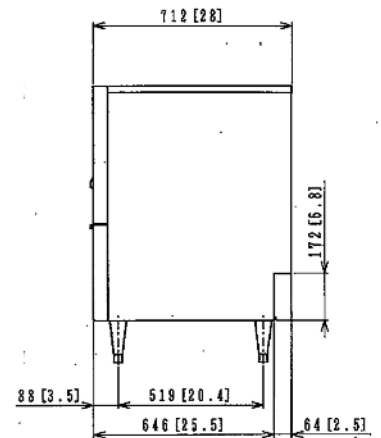

SIDE DIMENSIONS

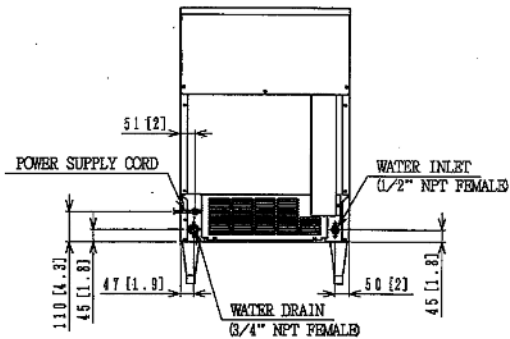

AIR-COOLED UNIT

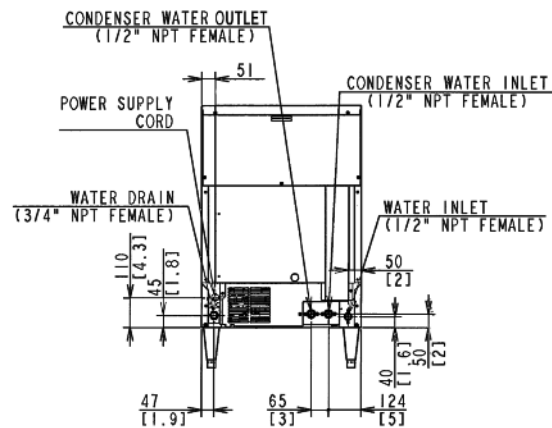

WATER-COOLED UNIT

### ELECTRICAL & PLUMBING/KM-151B\_H

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" independent drain connection
- 1/2" FPT Water Inlet
- 1/2" FPT Condenser Water Outlet (Water-cooled model only)
- 1/2" FPT Condenser Water Inlet (Water-cooled model only)

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

