SCOTSMAN

AUTOMATIC AIR AND WATER COOLED NUGGET ICE MAKER/DISPENSER



T D E 5 5 0

VOLUME PRODUCTION • 24 HOUR

Based on	Air-	Cooled	Water-Cooled		
Air/Water Temperatures	70°/50° lbs./kg.	90°/70° lbs/kg.	70°/50° lbs/kg.	90°/70° lbs./kg.	
TDE550	535/243	410/186	525/238	455/206	

YOU'LL VALUE OUR UNIQUE TOUCHFREE® ICE MAKER/WATER DISPENSERS

- Convenient one-handed operation sensors determine when to dispense water or ice.
- No risk of cross contamination.
- Complies with the most stringent requirements of the National Sanitation Foundation and the spirit of the Americans with Disabilities Act.
- Photoelectric eye bin control allows for maximum ice storage.
- Makes and dispenses soft, chewable nugget ice.

WARRANTY See your dealer for complete warranty details.

- 2 years parts on all components.
- 2 years labor on all components.
- 5 years parts on compressor.



NUGGET ICE

Versatile, inexpensive to produce, used in carbonated beverages and salad bars.



Sanitary, one hand operation

Easily fills various size and types of containers.



DMS21 STAND

26" x 21" x 36." Stainless steel.


This product qualifies for the following listing







Ice Machine Specifications

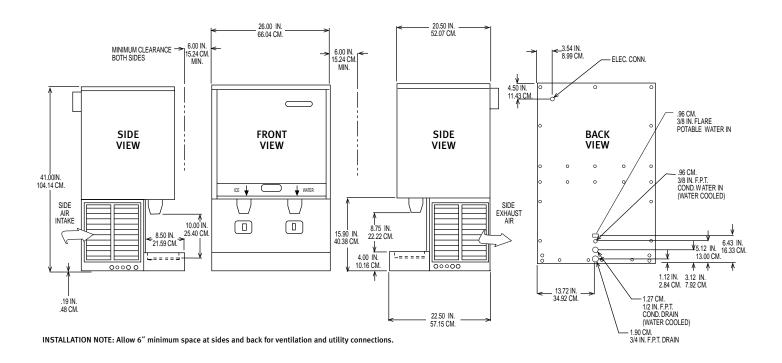

All models: Dimensions: W x D x H Unit: 26" x 22 1/2" x 41"				Shipping Carto	Shipping Carton: 30" x 24" x 46"							
	Model Number	Condenser Unit	Bin Cap. lbs/kg.	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker	Comp. HP	Circuit Wires	Min. Circuit Ampacity	Shipping Weight lbs./kg.	Power Consumption KWH/100 lbs. 90°/70°F	Water Gallons/ Potable 90°/70°F	
	TDE550AS-1A	Air	26/12	115/60/1	25	1/2	2	19.3	260/118	5.4	12	-
	TDE550WS-1A	Water	26/12	115/60/1	20	1/2	2	17.8	260/118	4.0	12	97.0

All units are stainless steel.

Refrigerant: R-404A.

OPTIONS:

KSP2: Splash panel kit to be used when the TDE550 is installed above a permanent sink and the sink assembly is not used.

DMS21B: Machine stand for NDE650. Width: 26". Depth 22 $^1/2$ ". Height: 36" with 6" legs. Available in stainless steel.

KWB3: Wall mounting kit.

ICE VENDING CAPACITY—PEAK VENDS PER HOUR

		1-Hr.	Number of Vends per Hour			
	Bin	Recovery	From Full Bin + Recovery			
	Cap.	Cap.*				
	lbs./kg.	lbs./kg.	1 oz. Vends	2 oz. Vends	3 oz. Vends	4 oz. Vends
TDE550A	26/12	22/10	400 + 350	200 + 175	130 + 115	100 + 85
TDE550W	26/12	22/10	400 + 350	200 + 175	130 + 115	100 + 85

^{*}Based on 70° Air and 50° Water Temperatures.

Scotsman's ice machines are not designed for outdoor installations. Scotsman remote condensers are designed for outdoor installations.

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Extended periods of operation at temperatures exceeding limitations constitutes misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Specifications and design are subject to change without notice.

Consult Your Local SCOTSMAN Representative At:

IMPORTANT OPERATING REQUIREMENTS:

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (37.7°C)
Water Temperatures	40°F (4.4°C)	100°F (37.7°C)
Water Pressures	20 PSIG	120 PSIG
Electrical Voltage	-5%	+10%