



S-150 • S-200 • S-250 Ice Dispensers

## S-150 • S-200 • S-250 Ice Dispensers



S-150 with water valve



S-250 with water valve  
and Indigo Ice Machine



S-200

Servend's S-Series ice dispensers feature a no-hassle one-piece structural base, strengthened drive train, and modular design, all resulting in a more durable ice dispenser.

### Standard Features

- Servend's patented paddle wheel ice dispense technology maximizes counter space.
- One-piece ABS base provides a solid foundation as well as adding structural rigidity to the dispenser.
- Enhanced agitation and drive system provides consistent ice dispense and ease of serviceability.
- Patented Rocking Chute™ simplifies ice dispensing and storage.
- Surround View™ merchandiser with attractive "ice" graphics draws customer attention.



ISO 9001:2000  
Quality System  
Certified

2100 Future Drive  
Sellersburg, IN 47172 USA


Tel: 812.246.7000  
Fax: 812.246.7024

[www.manitowocbeverage.com/us](http://www.manitowocbeverage.com/us)



## Specifications

	S-150	S-200	S-250
Standard Features	Lighted merchandiser, Ice graphics, leg kit, and drain kit.		
Approx. Shipping Weights	185.12 lbs. / 69.09 kgs.	235 lbs. / 107 kgs.	260 lbs. / 152 kgs.
Countertop Weight (w/o ice)	133.12 lbs. / 60.38 kgs.	184 lbs. / 69 kgs.	204 lbs. / 118 kgs.
Ice Storage Capacity	Up to 150 lbs. / 68 kgs.	Up to 200 lbs. / 91 kgs.	Up to 250 lbs. / 114 kgs.
Electrical Requirements	Dispenser: 120V/60Hz/2.8FLA. 220V/50Hz/1 also available.		
Drain	Single 0.75" (1.91 cm) PVC (N.P.T.) drain fitting extends from drain pan Units can be drained from the bottom or back of unit.		
Ice Machine Compatibility	Manual fill or top-mount with compatible ice machines. Contact MBE for adapter kit requirements for top-mounted ice machine applications.		
Options	Extended front splash panel, Flomatic water valve and side splash panels. S250 Model available with Flomatic 424 and 464 beverage valves in sanitary lever, push button, portion control or autofill. Other valves available, contact factory for details.		

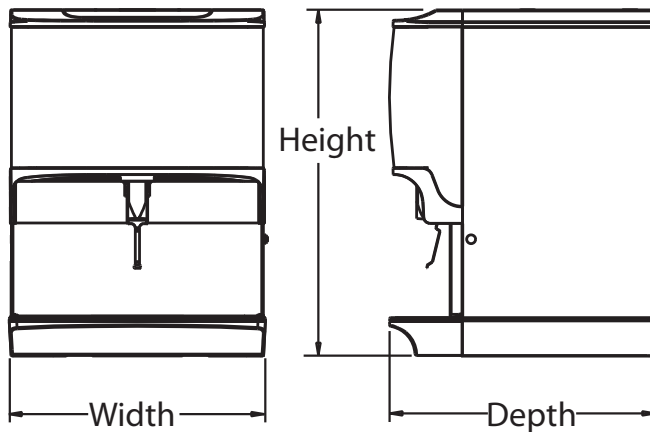

	S-150	S-200	S-250
Width	23.00"	30.00"	30.00"
	58.42 cm	76.20 cm	76.20 cm
Depth	31.13"	31.13"	31.13"
	79.07 cm	79.07 cm	79.07 cm
Height*	34.88"	34.88"	40.88"
	88.60 cm	88.60 cm	103.8 cm

\*Height dimension without full lid.  
Add .50" (1.27 cm) for full lid.